

# Compact Spread



## 10FT CONTAINERISED MODULES

### SL 1.5 OCON, 10FT DIVE CONTROL CONTAINER

**Description:**

The SL 1.s 10 ft. DNV 2.7.1 Container accommodates the Dive Control with partitioned section for the umbilical storage and standby diver seat area. The Air Dive Control area is fully air



## 10FT CONTAINERISED MODULES

### SL 1.6 MCON, 10FT MACHINERY CONTAINER

#### Description:

The SLI.6 Machinery comes in multiple configurations to suit the client's requirements which includes a combination of both HP and LP, two HP compressors or diver's hot water units. The container will have a forced draft fan for ventilation.





# COMMERCIAL DIVING CHAMBERS

# ALS00/100 COMMERCIAL DIVING CHAMBER

## Description:

Designed for use inside diving support vessels and coastal support bases, these diving chambers can be either built into the diving support vessel or containerised. The chamber is rated to a depth rating of 100m/334fsw in accordance with the latest ASME-PVHO code with U-stamp. The Pressure Vessel design is approved by ABS and the construction of the vessel is reviewed and witnessed by ABS surveyors. The chamber has two locks, namely the main and entry lock and complies with all standard IMCA requirements for a deck chamber used for re-compression including single view-ports in each lock. The internal fit-out includes sound-powered phones, a hyperbaric fire extinguisher, Stainless Steel wear surfaces and two internal bunks allowing for either two recumbent patients or six seated occupants. The control panel is fitted with an oxygen analyser, two pressure-indicating gauges, one therapeutic gauge, an electrical control panel and a twin-lock communications panel. The gas systems on the chamber include dual pressurisation of the main and entry lock. The electrical system includes a battery back-up and a dual incoming power supply.



## ALS00/100 COMMERCIAL DIVING CHAMBER

### SPECIFICATION:

Inner Dia:  $\pm 1800\text{mm}$  ( $\pm 72''$ ) Length: 3781mm

(149'') Width: 1940mm (76'')

Height: 2225mm (88'') Weight: 3780kg  
(empty)

4100kg 3 (fitted out) Volume: 8.9 m

Entry Lock Volume: 3 2.7m<sup>3</sup> Main Lock: 6.2m.



# 20 FT OFFSHORE CONTAINERISED MODULES


## SL 3.6 MCON, Machinery Container

### Description:

The SL3.6 Machinery comes in multiple configurations to suit the client's requirements. The container is partitioned into two areas. The larger area accommodates the machinery with the other area fitted out as a workshop and general storage room or as a HP gas storage area. The machinery area may include two HP compressors and a LP compressor or an HP compressor with diver's heaters. As an option, the machinery container can include a sub-sea tools HPU and a 12 cylinder gas bank in a handling frame.



### Illustration:

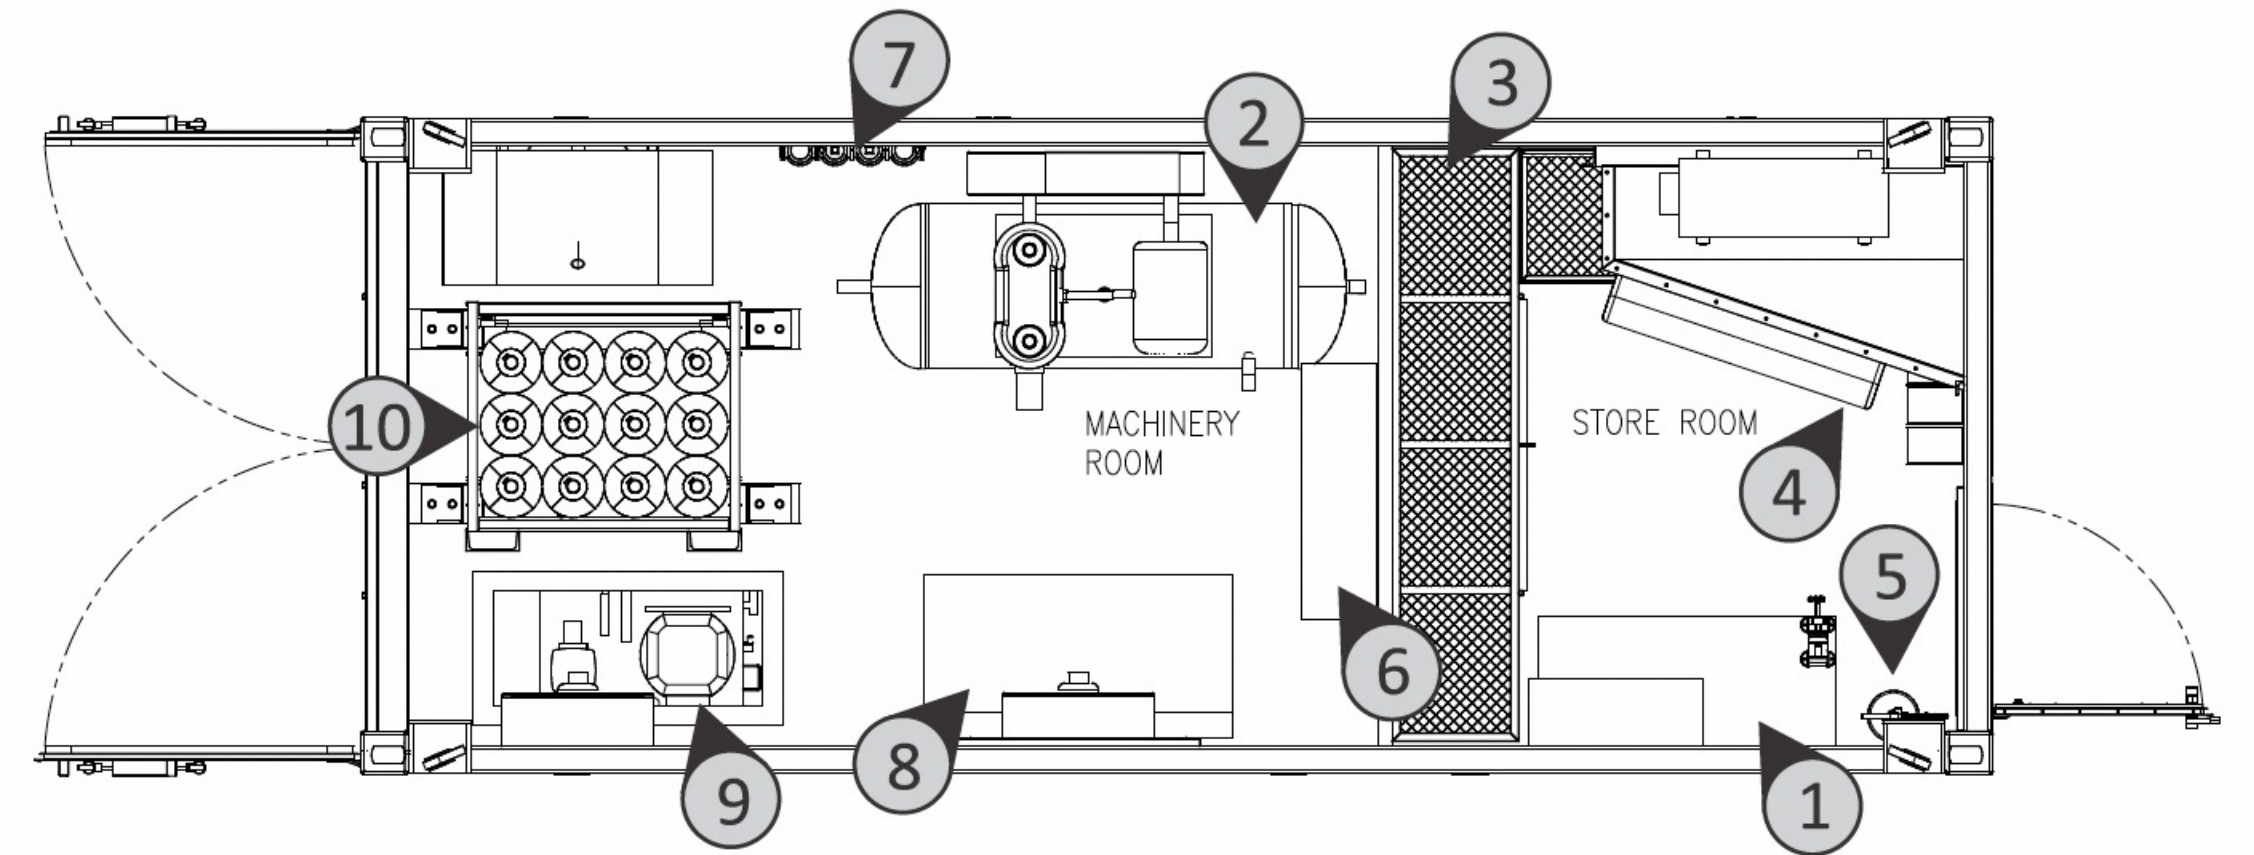

No:	Description	No:	Description
1	Work bench	6	Solid Room Divider
2	LP Compressor	7	Air Filtration
3	Lockable Storage	8	HP Compressor (Fan above)
4	Air-Conditioner	9	Hydraulic Power Rack (Stowed)
5	Fire Extinguisher	10	12 Cylinder Gas Bank (Stowed)

T  
H  
A  
N  
K  
  
Y  
O  
U

**THANK  
YOU**

